

ESC	Motor	Battery		Battery Configuration		Tire	Tire Insert	Wheel	Body
		Shorty: ___ V x ___ Pcs	Standard: ___ V x ___ Pcs	<input type="checkbox"/> STF <input type="checkbox"/> STM <input type="checkbox"/> STR	<input type="checkbox"/> Inward <input type="checkbox"/> Outward				
A	KV	Mah		<input type="checkbox"/> SD2 (Stander 2S)	<input type="checkbox"/> SD4 (Stander 4S)				

● Diff Gear Set-Up


	Front	Center	Rear
Diff. Fluid	#	#	#
	___ x ___ T	___ x ___ T	___ x ___ T

● Shock Set-Up

Cap <input type="checkbox"/> Bladder <input type="checkbox"/> Emulsion	Front	Rear
Oil Brand: _____	#	#
Spring Collar Spacer	mm	mm
Pistons	φ ___ x ___	φ ___ x ___
Spring		


● Ride Height

Front	Rear
mm	mm

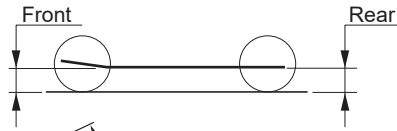

● Rebound

Front	Rear
mm	mm

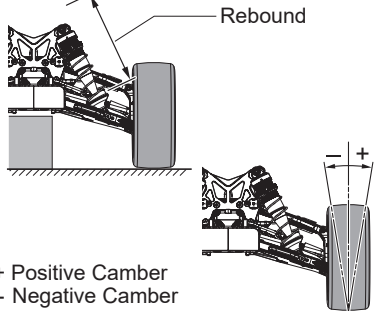

● Camber Angle


Front	Rear
+ °	+ °
- °	- °

+ Positive Camber
- Negative Camber


● Wheelbase _____ mm

● Track Width _____ mm

● Shock Mount Position



● Rear Upper Arm Position

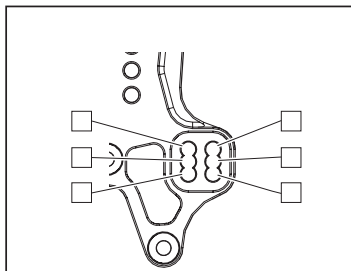

- 0mm
- 2mm
- 3mm
- 5mm

- HEX:
- 4.5mm
 - 5.5mm
 - 6.5mm



Sus. Arm

Front	<input type="checkbox"/> In	<input type="checkbox"/> Out
Rear	<input type="checkbox"/> In	<input type="checkbox"/> Out

● Rear Hub

- Plastic
- Aluminum

Hub Carrier Bush
 Plastic

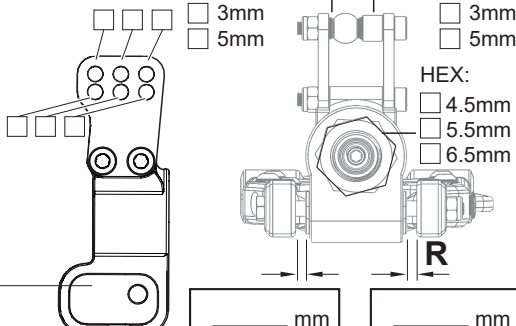

● Arm

Front	Rear
<input type="checkbox"/> Soft	<input type="checkbox"/> Soft
<input type="checkbox"/> Hard (Std.)	<input type="checkbox"/> Hard (Std.)
<input type="checkbox"/> _____	<input type="checkbox"/> _____

● Front Hub Carrier



- Plastic Aluminum
- 16° 20° _____°

● Front Upper Arm

- A Arm Linkage


● Front Upper Arm Position

⊗ Not Recommended

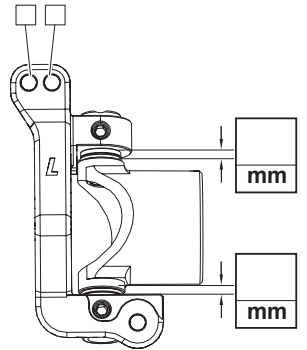

● Toe Angle

Front	
+	°
-	°

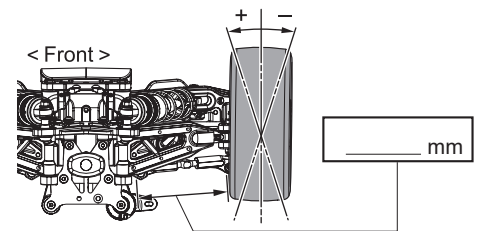


● Front Toe-In ⊗ Not Recommended



● Rear Toe-In ⊗ Not Recommended



● Steering Plate



● Sway Bar

Front	Rear
φ	φ
mm	mm

● Wing

- High Force
- Holes
- Without

● Wing Position / Angle

- H
- M
- L
- H
- M
- L
- 0°
- +1.5°
- +3°

Notes